PROJECT # P-394

PHILADELPHIA STATE HOSPITAL

PHILADELPHIA PENNA.

REMODELING FEMALE PATIENT BUILDINGS 8 & 10

GENERAL INDEX OF CONTRACT DRAWINGS

GENERAL CONSTRUCTION

SHEET Nº	TITLE
Cover Sheet	Index, Symbols, & Abbreviations
1.	Basement Floor Plan
2.	First Floor Plan
3.	Second Floor Plan
4.	Elevations
5.	Location Plan, Sections, Details
6.	Stairs, Details
7.	Room & Stair Details
8.	Miscellaneous Details
9.	Miscellaneous Details
10.	Foundation Plan, Details
11.	1st & 2nd Floor Framing Plan

PLUMBING

SHEET Nº	TITLE
P-1	Basement Plan
P-2	First Floor Plan
P-3	Second Floor & Loft Plans

HEATING & VENTILATING

SHEET Nº	TITLE
HV-1	Basement Plan
HV-2	First Floor Plan
HV-3	Second Floor & Loft Plans

ELECTRICAL

SHEET Nº	TITLE
E-1	Basement Plan
E-2	First Floor Plan
E-3	Second Floor & Loft Plans

ABBREVIATIONS

∠	Angle	Dn.	Down	Lav.	Lavatory
Bldg	Building	Dwg.	Drawing	L.S.	Limestone
Br.	Brick	El.	Elevation	Mar.	Marble
C	Channel	Enc.	Enclosure	Mat.	Material
C.	Check Valve	Ent.	Entrance	O.C.	On Center
C.to C.	Center to Center	Ext	Exterior	Pl.	Plaster
Cab.	Cabinet	Fl.	Floor	R.W.C.	Rain Water Conductor
Cem	Cement	F.S.	Full Size	Spec.	Specification
Cer.	Ceramic	Fur.	Furred	St'l.	Steel
C.I.	Cast Iron	G.I.	Galv. Iron	Susp.	Suspended
Clg.	Ceiling	Gl.	Glass	Ter.	Terrazzo
C.O.	Clean Out	Gr.	Grade	W.G.	Wire Guard
Col.	Column	Gl.T.	Glazed Tile	W.Gl.	Wire Glass
Conc.	Concrete	H.M.	Hollow Metal	W.C.	Water Closet
Const.	Construction	H.T.	Hollow Tile	Ac.P.	Acoustic Plaster
Cop.	Copper	I.	Iron	A.D.	Area Drain
D.H.	Double Hung	Int.	Interior	Al.	Aluminum
Dim.	Dimension	K.	Keene	C.B.	Catch Basin
Fr.	Frame	M.T.	Metal Threshold	M.O.	Masonry Opening
Fin.	Finish	Opg.	Opening	Pres.	Present
S.S.	Slop Sink	T.C.	Terra Cotta	V.	Vent or Ventilator

SYMBOLS

NOTE - All Symbols are for Plans and Sections unless marked "Elevation"

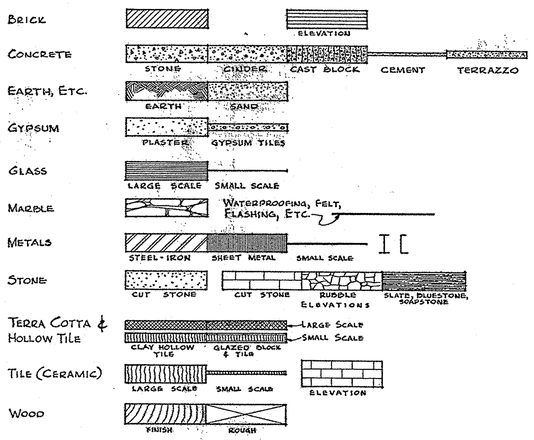

ABBREVIATIONS.

C.W.	Cold Water.	F.D.	Floor Drain	Lav.	Lavatory
H.W.S.	Hot Water Supply	A.D.	Area Drain	W.C.	Water Closet
H.W.R.	Hot Water Return	C.O.	Clean Out	Uri.	Urinal.
R.W.C.	Rain Water Conductor	T.C.	Terra Cotta.	S.S.	Service Sink.
D.W.C.	Drinking Water Cooler	C.I.	Cast Iron.		

SYMBOLS

Cold Water	
Hot Water Supply	
Hot Water Return	
Vent Line	
Sanitary Sewer	
Storm Water & Drainage	
Check Valve	N
Gate Valve	
Globe Valve	
Plumbing Fixture Type (See Specs.)	A

ABBREVIATIONS.

S.	Heating Supply	P.R.S.	Pressure Reducing Station	R.P.M.	Revolutions per Minute
R.	Heating Return	F.&T. Trap	Float & Thermostatic Trap	O.V.	Outlet Velocity
L.P.	Low Pressure Steam	Exh.	Exhaust	S.P.	Static Pressure
H.P.	High Pressure Steam	Reg.	Register.	HP	Horse Power.
E.D.R.	Equivalent Direct Radiation	G.P.M.	Gallons per Minute.		

SYMBOLS.

Condensate Pump Discharge	o o
High Pressure Steam	HPS HPS
Heating Steam Supply	S S
Heating Steam Return.	
Thermostat	T
Supply Outlet	
Exhaust Inlet.	

SYMBOLS

100-c.p.	Ceiling Outlet
60-c.p.	Wall Outlet — Numerals indicate wattage and fixture type
	Fluorescent Outlet.
	Duplex Receptacle.
	Single Receptacle (20 Amps.)
	Exit Light
	Exit Light - Double faced - Directional - Hung from ceiling.
U	Night Light Outlet.
R	Radio Outlet
C	Clock Outlet (115 Volt)
S	Single Pole Switch.
S_3	Three Way Switch.
F	Fire Alarm Station
F	Fire Alarm Bell
	Branch Circuit Concealed in Ceiling or Wall
	Branch Circuit Concealed in Floor
	Home Run to Panel Board
	Lighting Panel
U	Unit Heater HP as noted.
M	Motor HP as noted.
	Safety Switch
S_P	Switch and Pilot Light
	Magnetic Starter.
	Telephone.
A	Heavy Duty Receptacle with Grounding Leg Locking Type - 35 Amps

OWNER

COMMONWEALTH OF PENNSYLVANIA
HON. JAMES H. DUFF — GOVERNOR
DEP'T OF PROPERTY & SUPPLIES
HON. C. M. WOOLWORTH — SECRETARY
HON. W.W. BEHRENS — DEP'T SECRETARY
HARRISBURG PENNA.

ARCHITECTS

SAVERY, SCHEETZ & GILMOUR — ARCHITECTS
EGGLY-FURLOW ENGINEERS — ENGINEERS
1500 WALNUT STREET — PHILA., PENNA.

2-7-1